


## Hydraulic Tunnel Thruster

## CT 225 HYD

MAX POWER range of hydraulic tunnel thrusters is suitable for medium to heavy displacement and high windage yachts from 40'-85'. Designed for durability and performance, the hydraulic tunnel thrusters are ideal when long runtimes are required. Manufactured with corrosion-resistant components, these models are robust and water-resistant with a variety of unique features.

### Specifications

Model	CT 225 HYD	
Code	317591	636762
Max Thrust (kgf/lbs)	220 / 441	220 / 441
Hydraulic Power (kw)	13,5	13,5
Propellers	Duo	Duo
Drive Leg (material)	Composite	Bronze*
Weight (kg)	19	20
A (mm)	220	220
B (mm)	220	220
C (mm)	220	220
D (mm)	250	250
E (mm)	7 to 8	7 to 8
Boat Type	Boat Length (Feet/Metres)	
Heavy Displacement, High Windage & Cruising	45' - 58' / 13,7 - 17,6m	45'-58' / 13,7- 17,6m
Medium Displacement, Medium Windage & Fast Cruising	53' - 69' / 16 - 21m	53'-69' / 16-21m
Light Displacement, Light Windage & Super Fast Cruising	60' - 75' / 18 - 22,8m	60'-75' / 18-22,8m

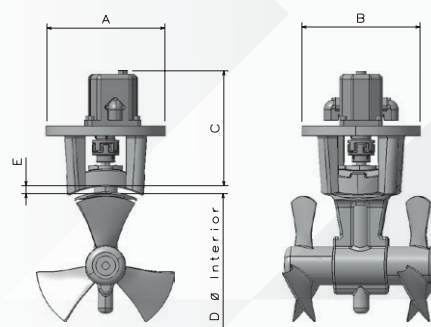

- Branded hydraulic components
- Patented composite drive legs
- Long runtimes
- Zero maintenance
- Water-resistant
- Electronic control boxes for unrivaled safety features

### Unique Features



Composite drive legs



Line shields



Zero maintenance



Case hardened spiro-conical gears



Branded hydraulic components



Water resistant



Unrivaled safety features

### Control Panels

MAX POWER's thruster control systems include a variety of advanced safety features.

- Childproof activation
- Automatic shutdown after 30 minutes of inactivity
- Visible and audible overheat warning
- Time delay switch between port and starboard thrust
- Software protection against short circuits

